


CHR8-MO




MARINE OUTDOOR CEILING HINGE RANGE



future automation

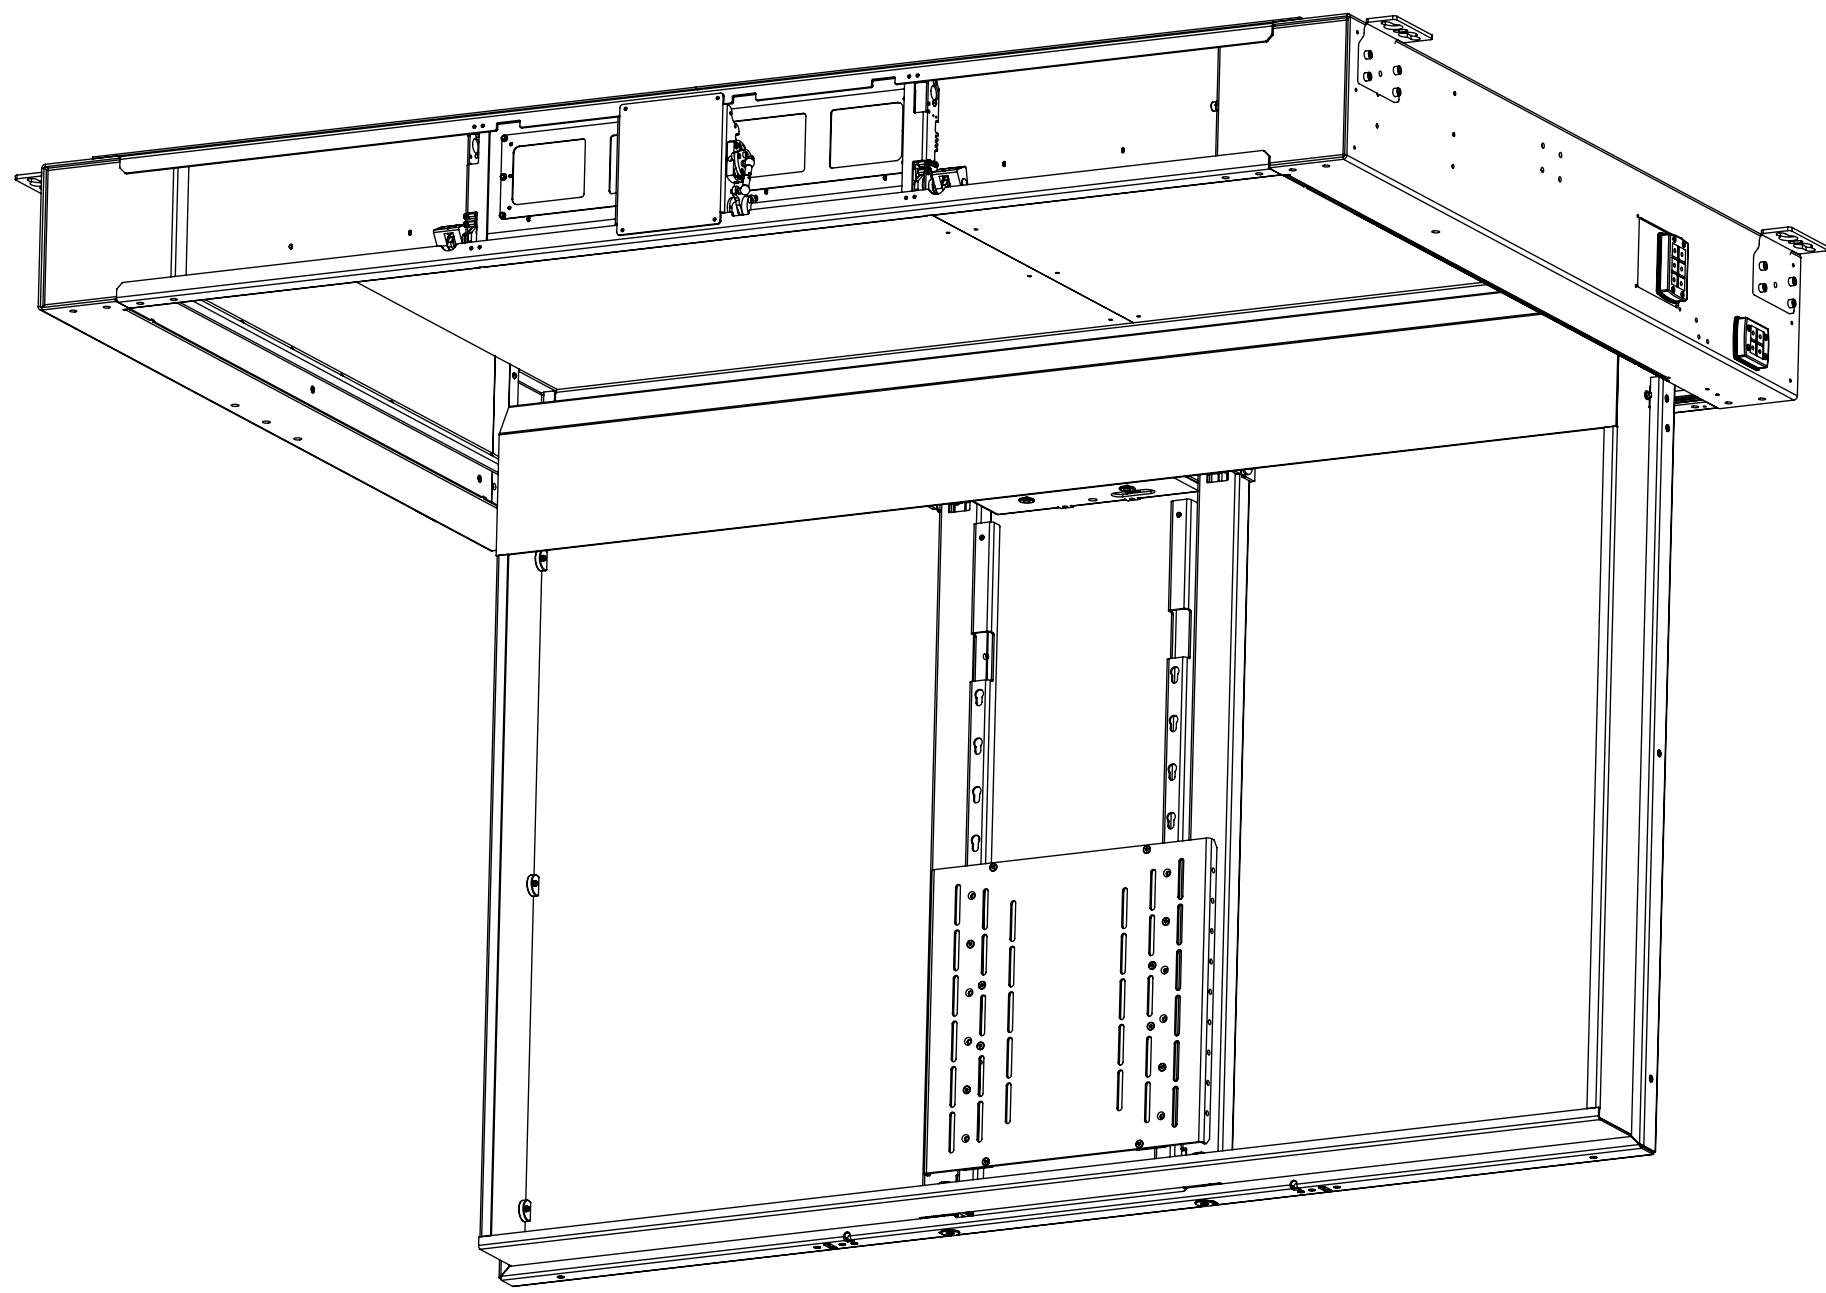

MECHANISM AS SUPPLIED

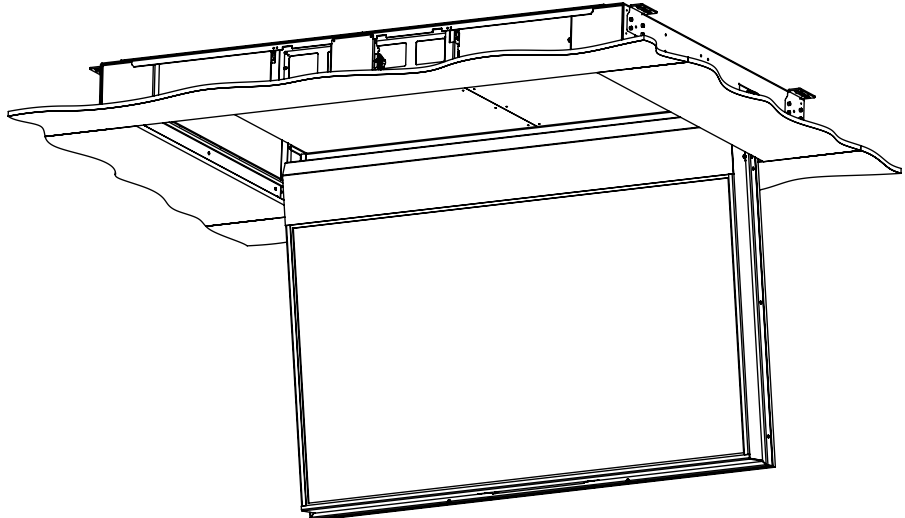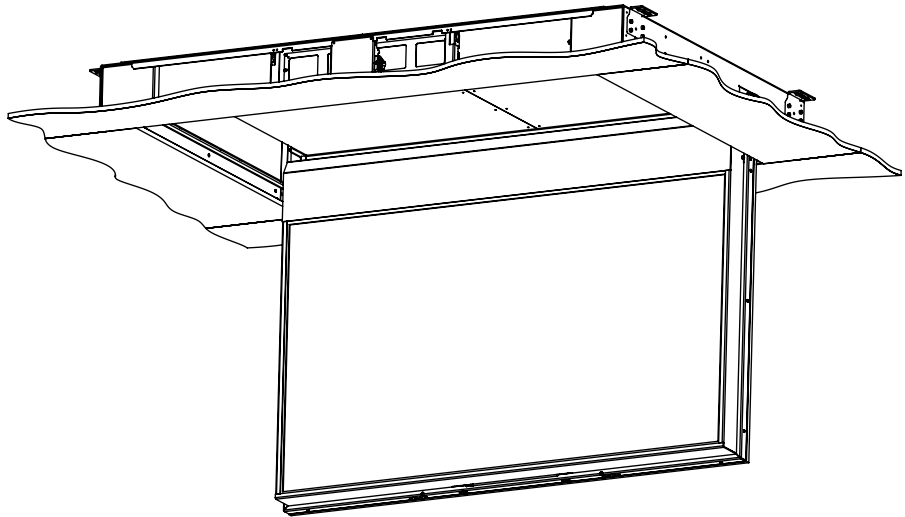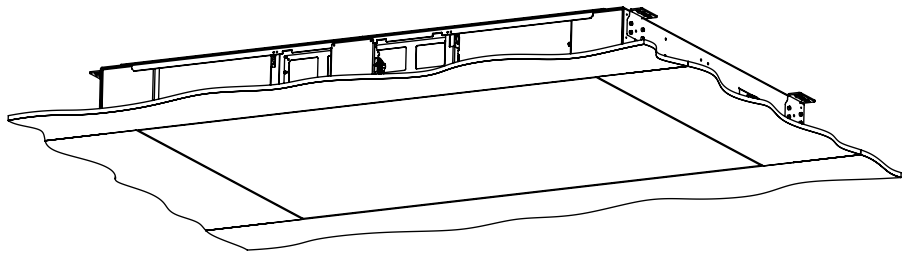

CHR8-MO

MARINE OUTDOOR CEILING HINGE RANGE



future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions	2474mm (97.4") W x 1545mm (60.8") L x 245mm (9.6") D
Product Weight	180Kg (396lb)
Maximum Screen Size	1980mm (78.0") W x 1130mm (44.5") L x 150mm (5.9") D
Maximum Weight Capacity	120Kg (264lb) Inc 30kg [66lbs] max. Addon Ceiling Panel Main Hinge
Packaging Dimensions	2510mm (98.8") W x 1720mm (67.7") L x 500mm (19.7") D
Shipping Weight	300Kg (660lb)
Maximum Rotation	100° - programmable limit to 90°
Movement Type	Motorised
Control System	In IP66 Control box on 3m [10'] Loom
Power Supply Required	110V - 240V AC 50/60Hz
Power Consumption Max.	720W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Marine suitable version
Package Contents	Mechanism, IR remote control
Environment	Marine Outdoor
Colour	WHITE - RAL9910 Satin Finish
Marine Suitable	Yes - Marine Locks for secure stowing when not in use - Weatherproof when closed due to Marine Seals .


CHR8-MO

MARINE OUTDOOR CEILING HINGE RANGE



future automation

MECHANISM MOUNTING DETAILS

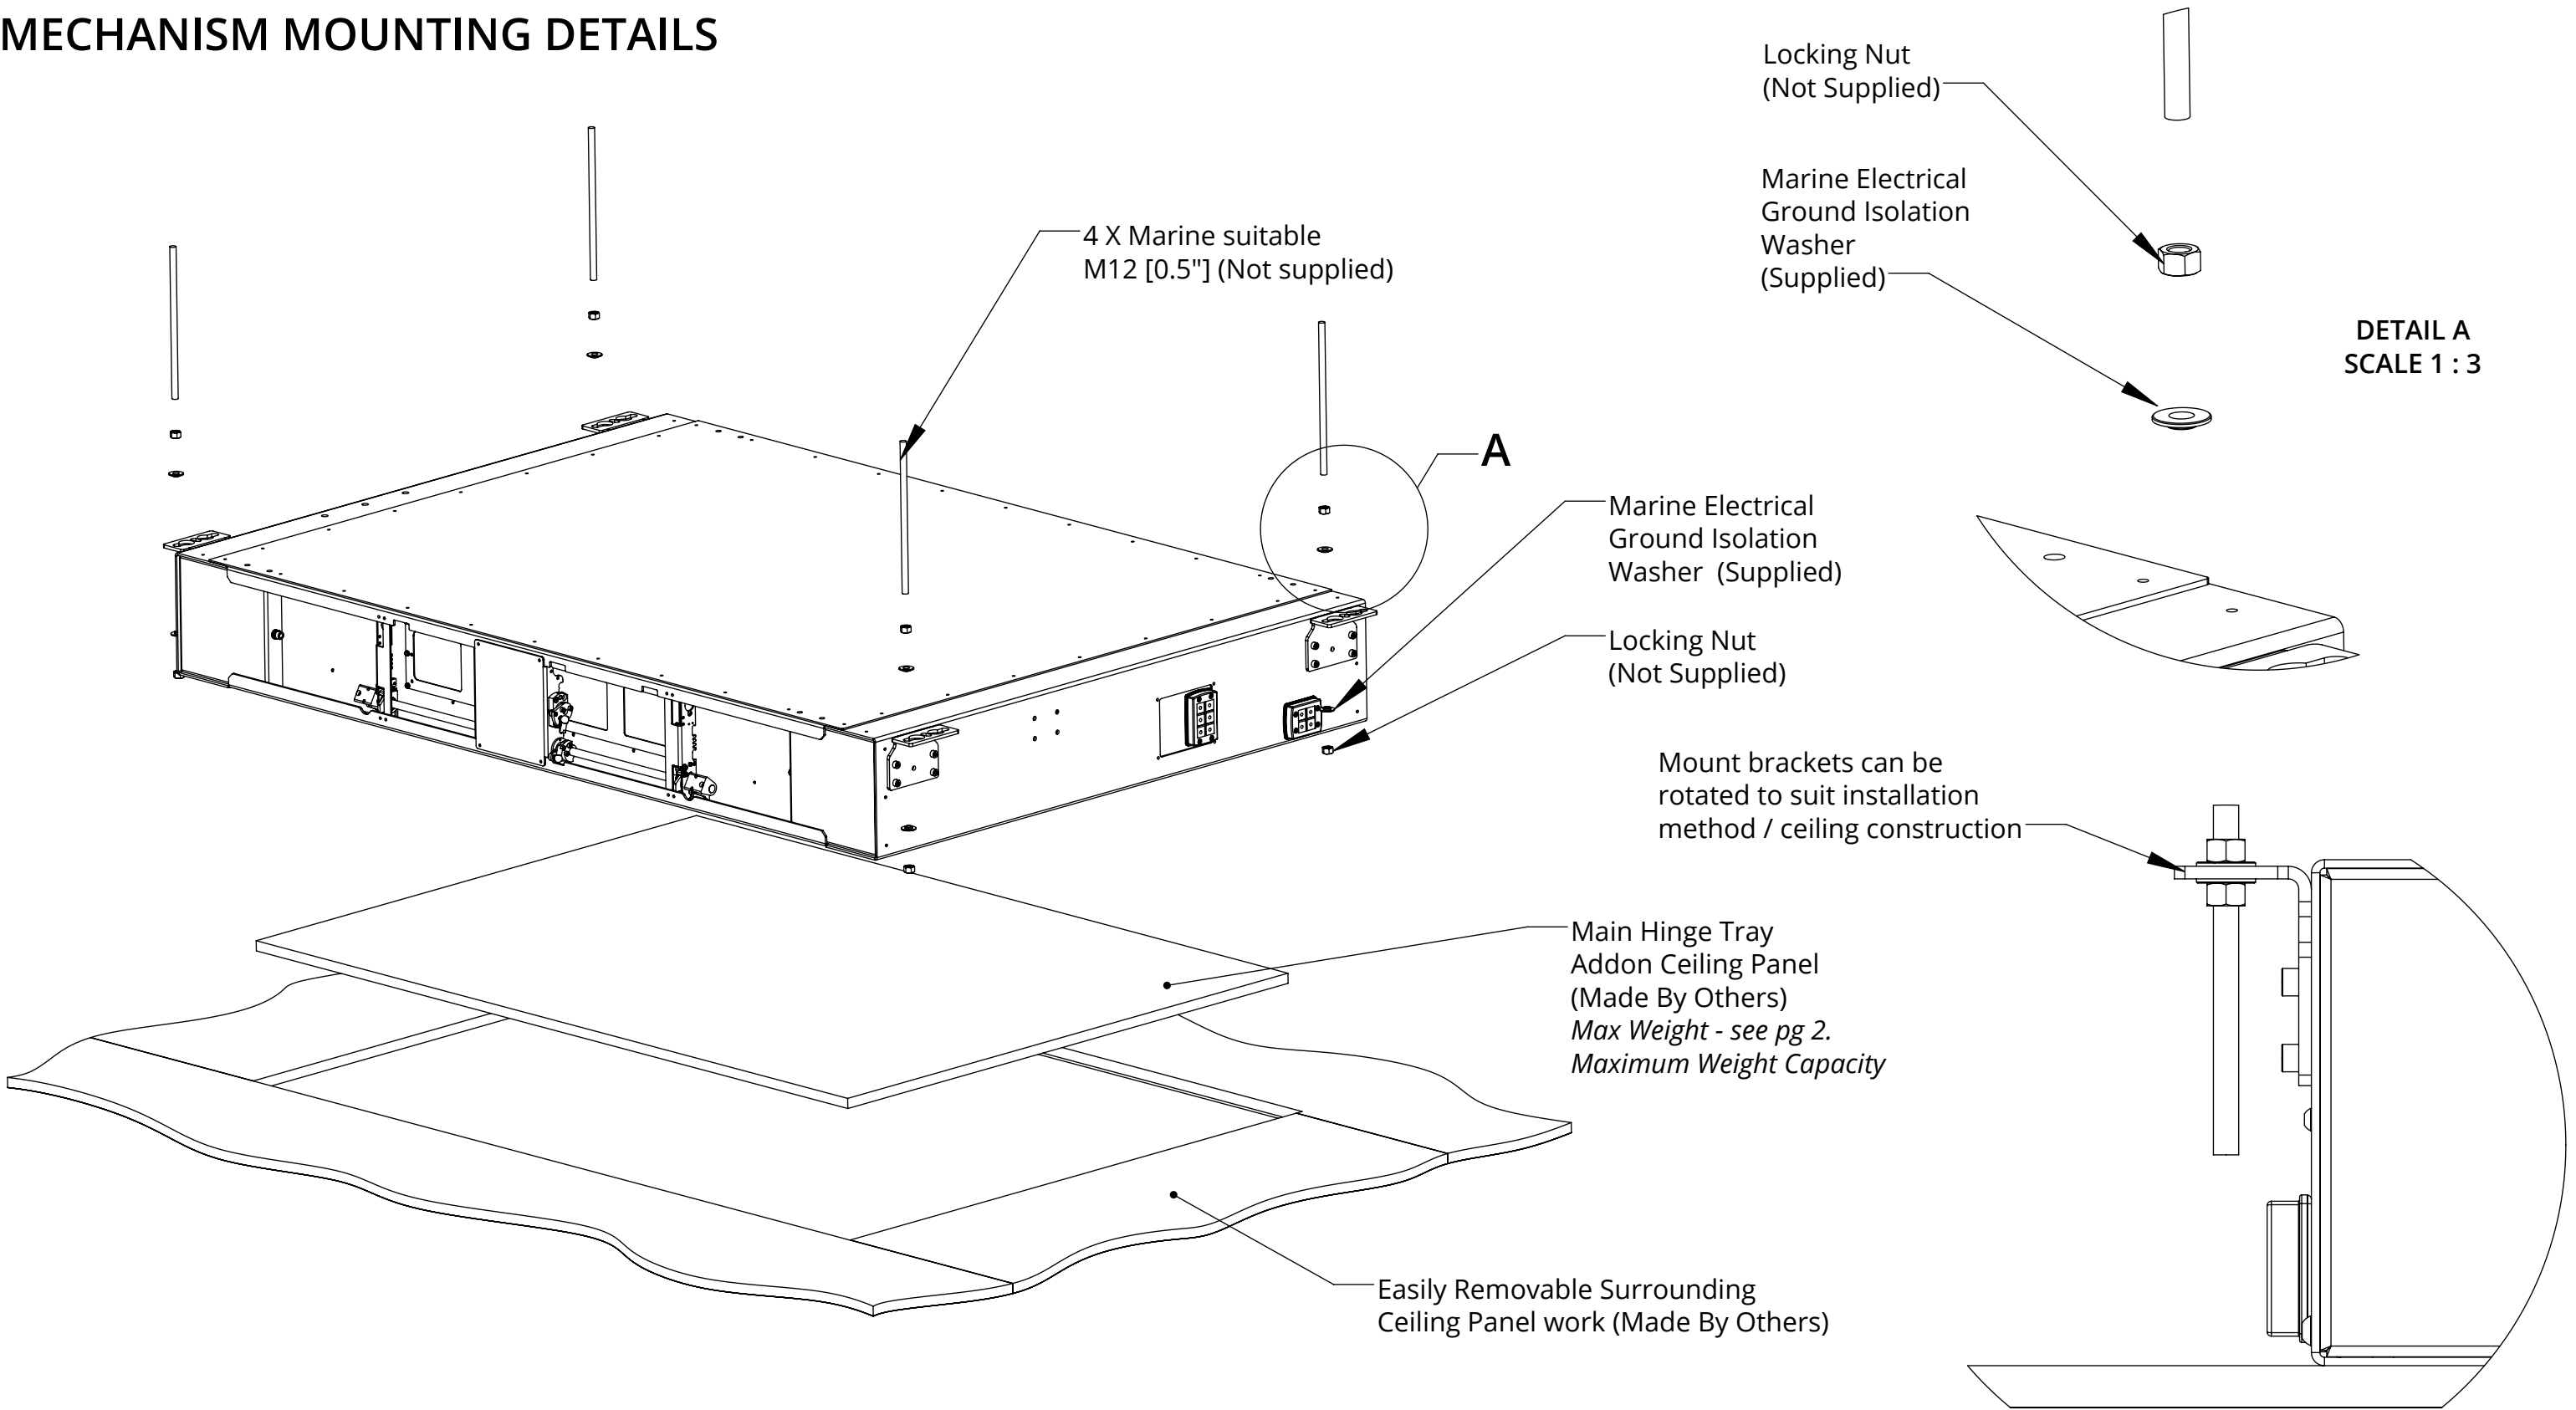


CHR8-MO

MARINE OUTDOOR CEILING HINGE RANGE




CEILING PREPARATION

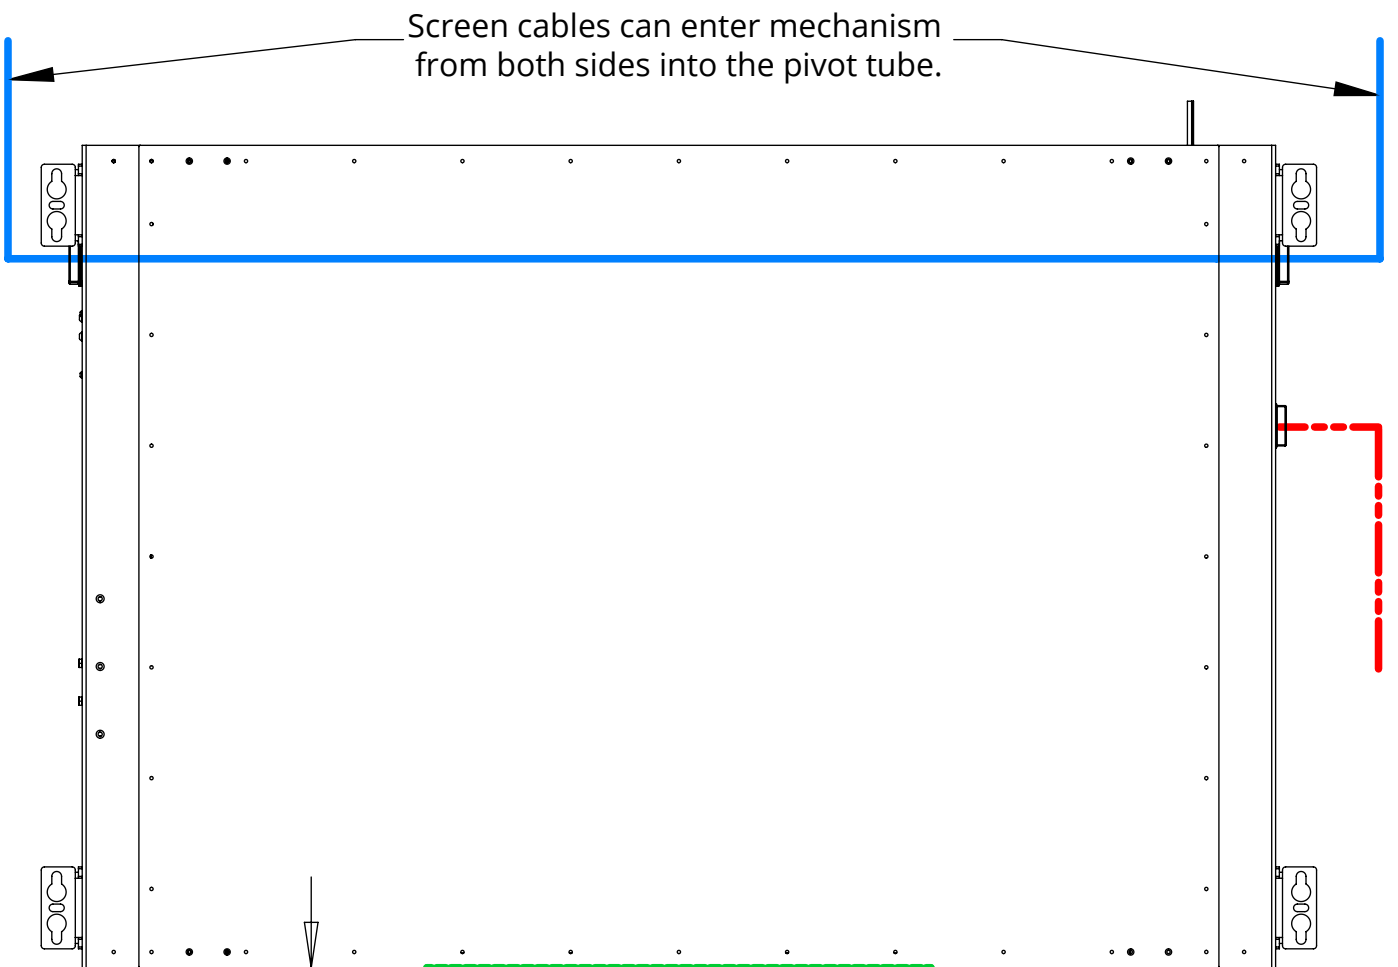

Screen cables can enter mechanism from both sides into the pivot tube.

Keep this area in front of mechanism in ceiling free of obstruction for maintenance and servicing.


- - - - - Mechanism Power and Control Cables.
- Screen power and Signal

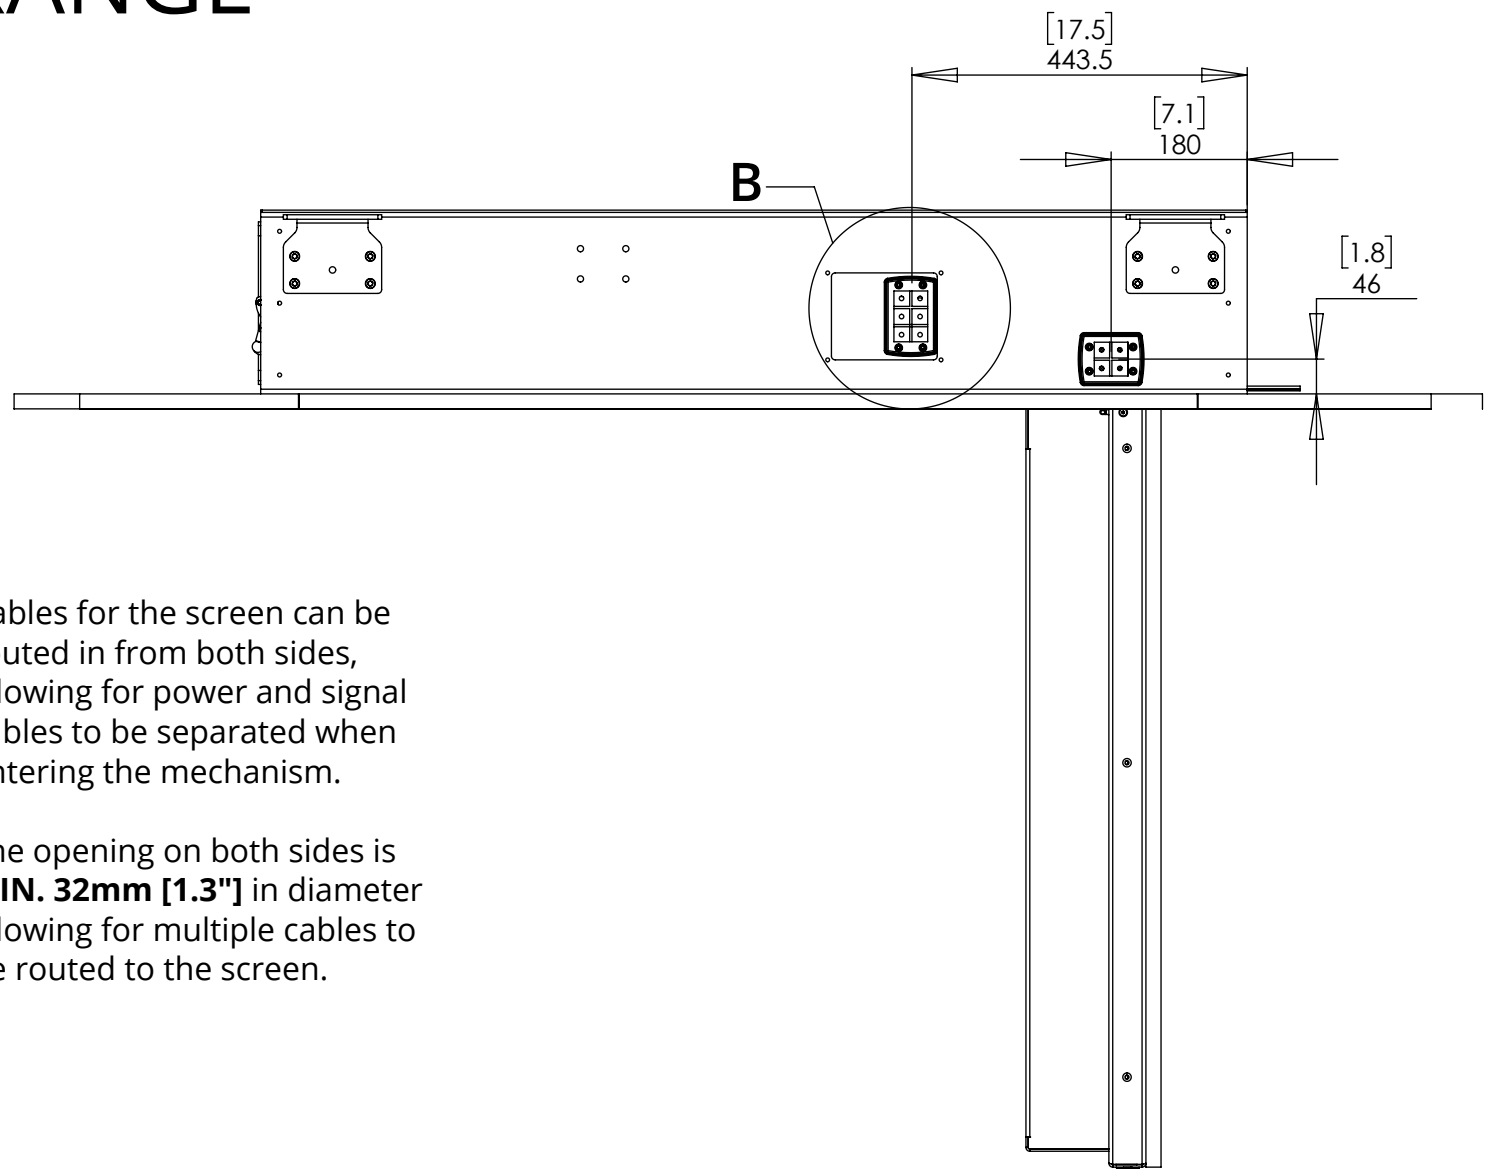

Cables for the screen can be routed in from both sides, allowing for power and signal cables to be separated when entering the mechanism.

The opening on both sides is **MIN. 32mm [1.3"]** in diameter allowing for multiple cables to be routed to the screen.

Cables pass through easily removable cable gland plates into mechanism. Additional glands to suit different cable sizes are available on request.

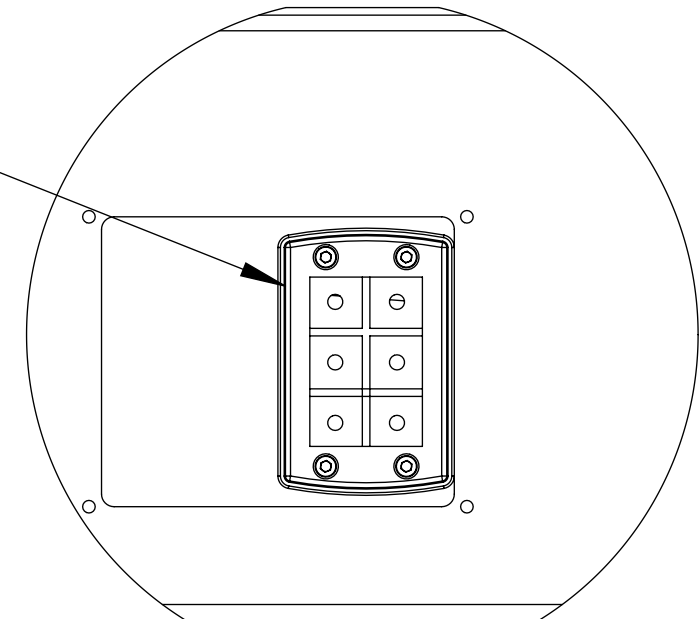

DETAIL B
SCALE 1 : 3


CHR8-MO

MARINE OUTDOOR CEILING HINGE RANGE





future automation

CEILING DETAILS

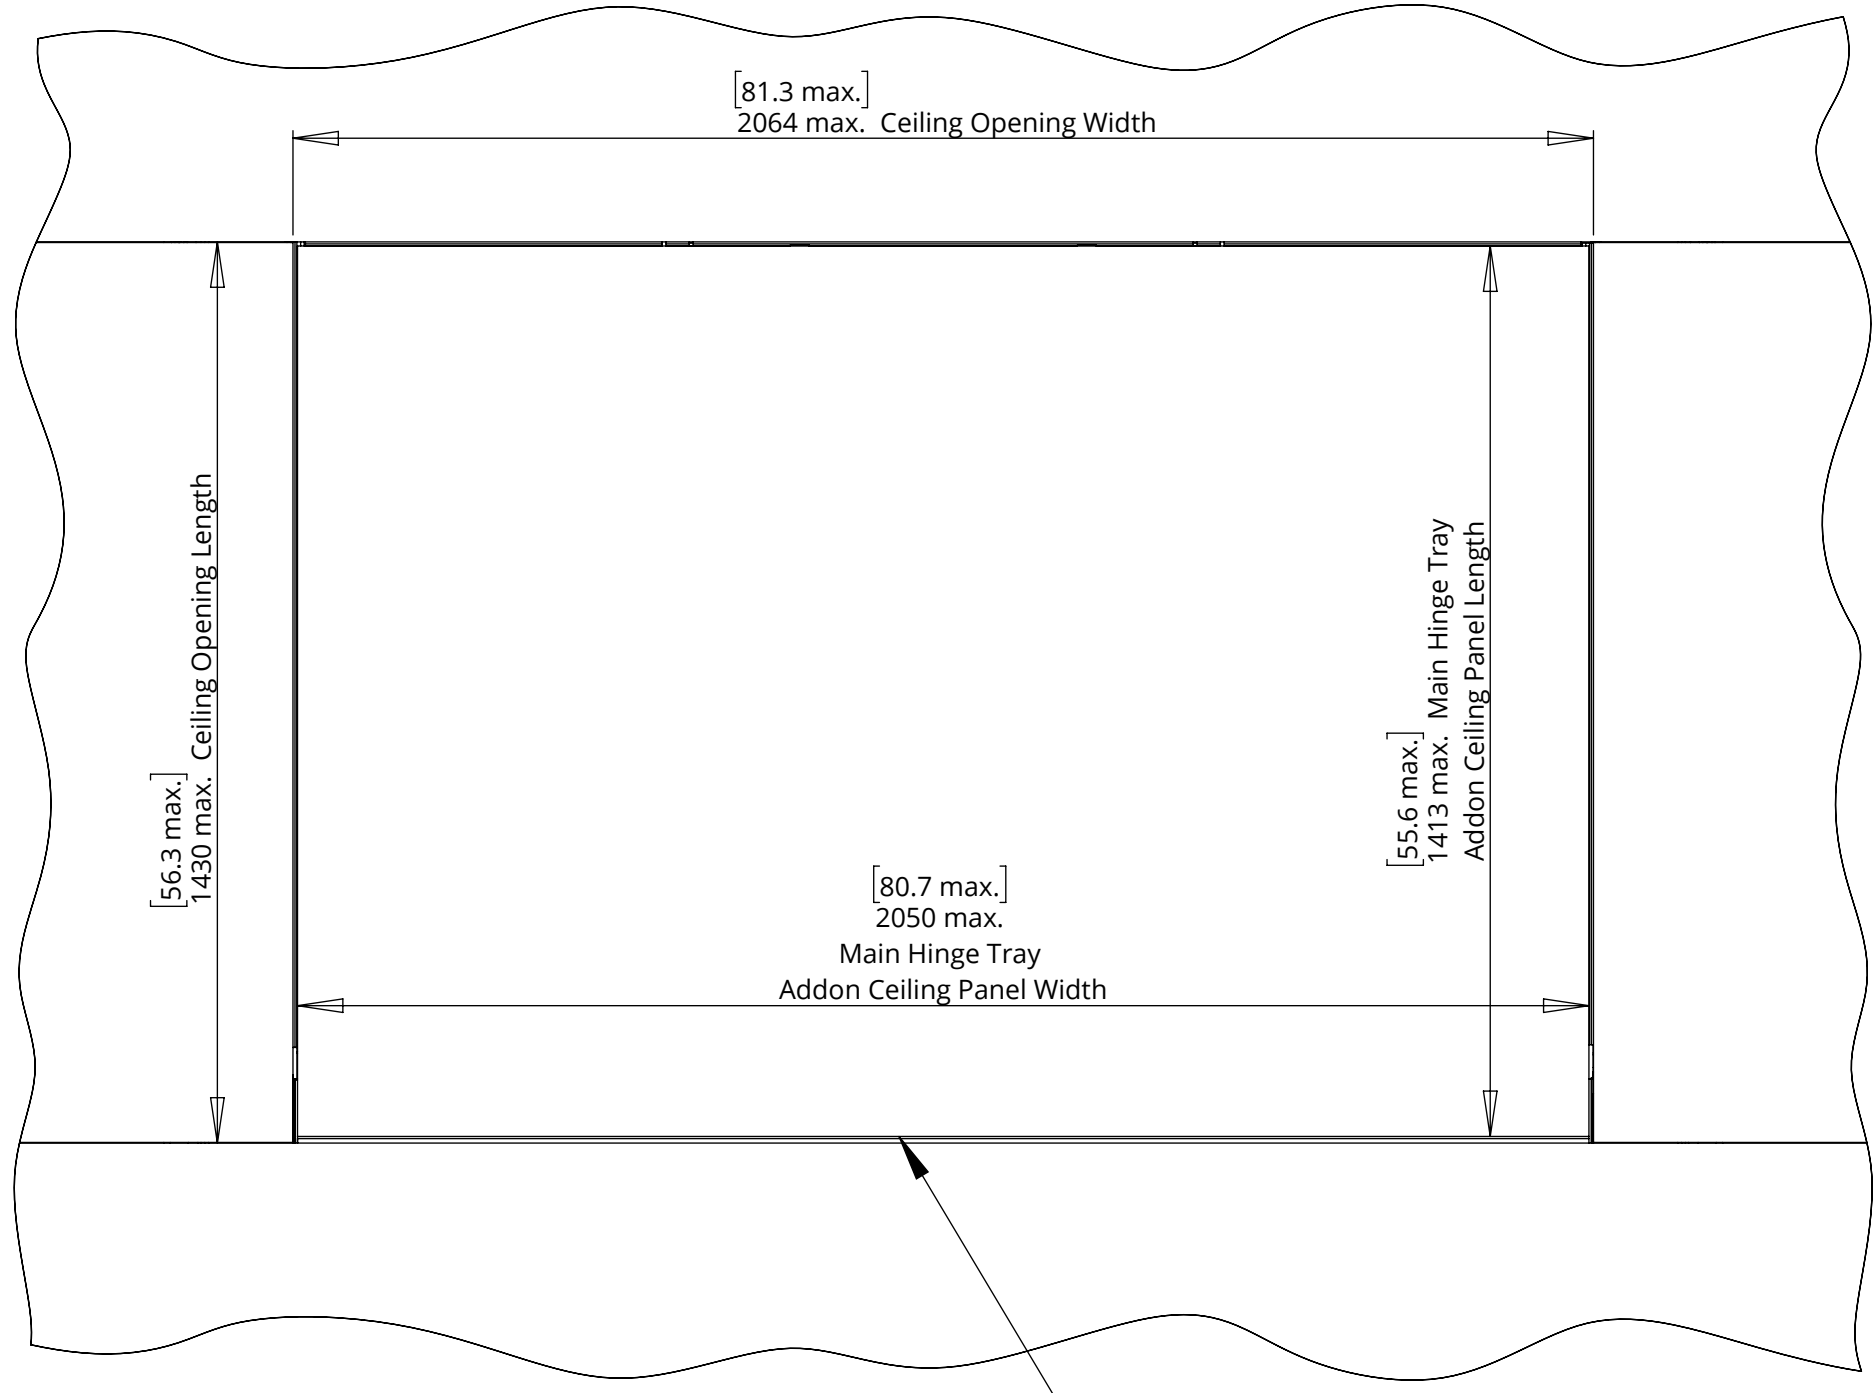

Mechanism designed to work with min. 7mm [0.3"] shadow gaps

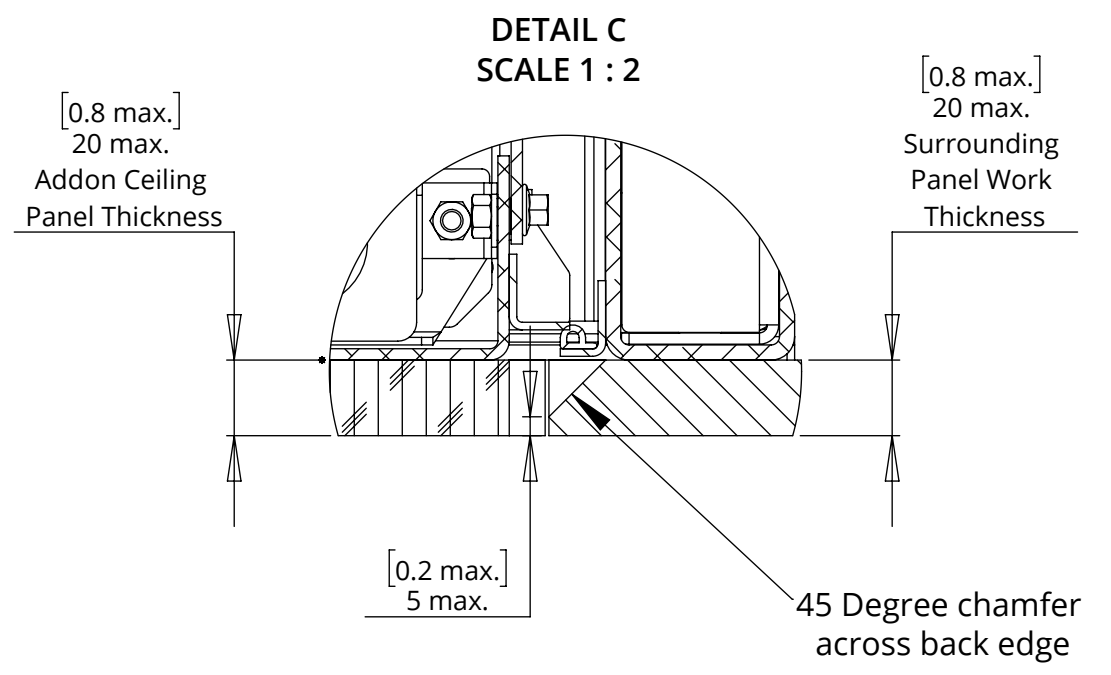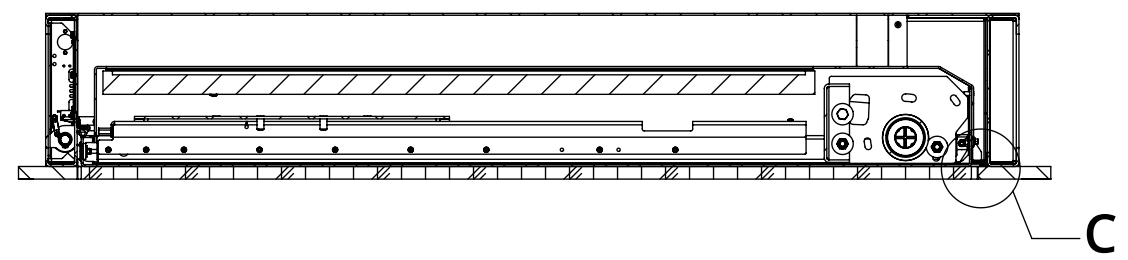

Ensure all panel work is the same thickness.

Weight of all addon panel work must be included in maximum mechanism lifting capacity.




CHR8-MO

MARINE OUTDOOR CEILING HINGE RANGE




future automation

MECHANISM DIMENSIONS - CLOSED

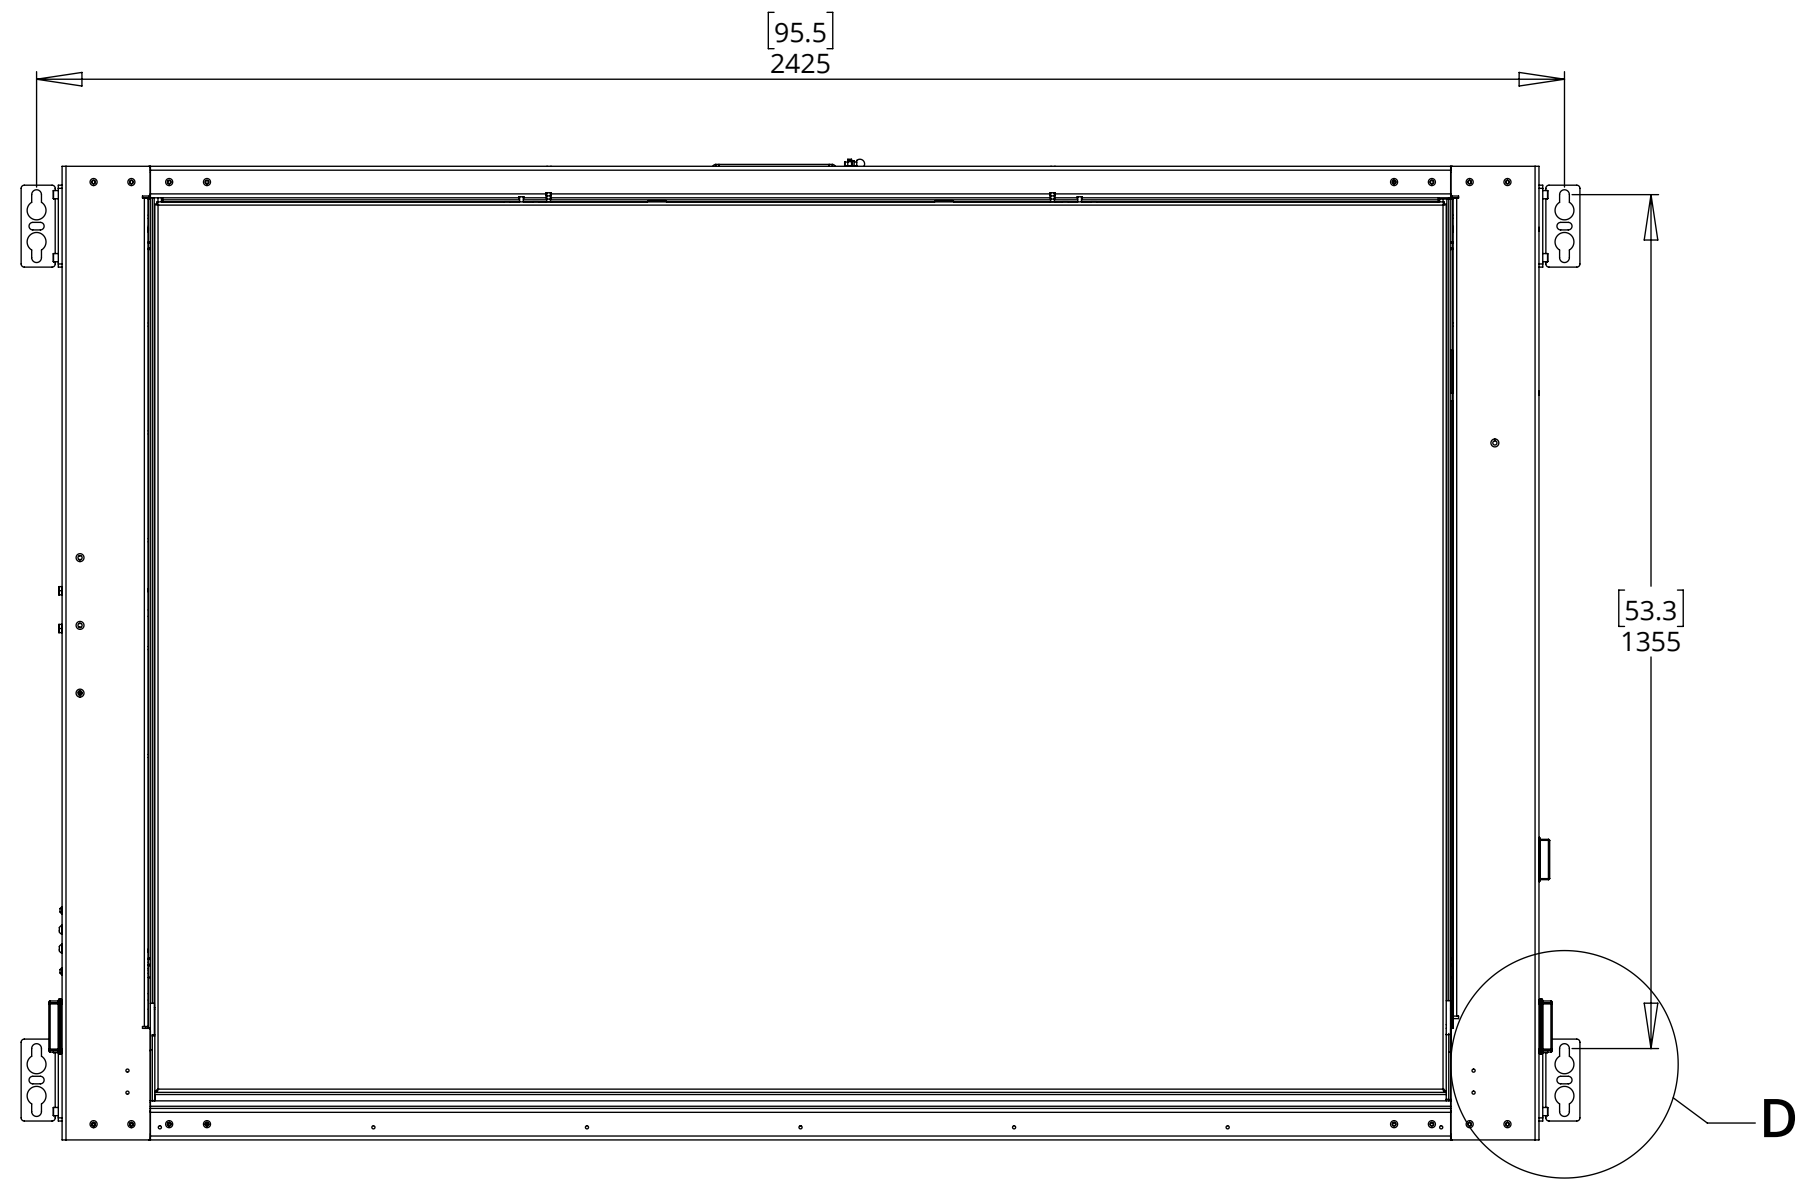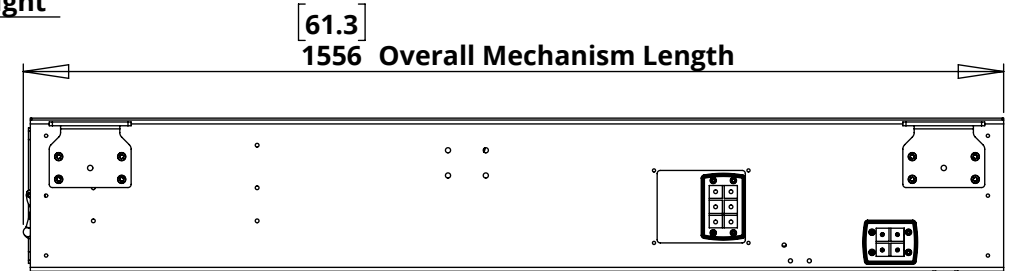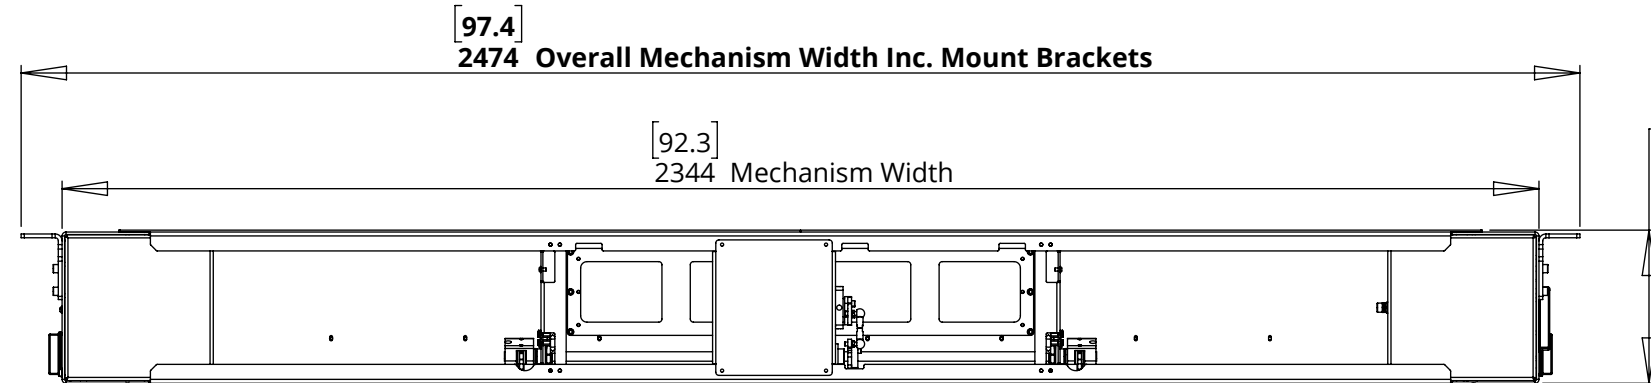

FIXING DETAIL

Mechanism mounted on M12 [0.5] Studding or fixed to underside of the ceiling joist structure, both using the mounting brackets installed on mechanism as standard

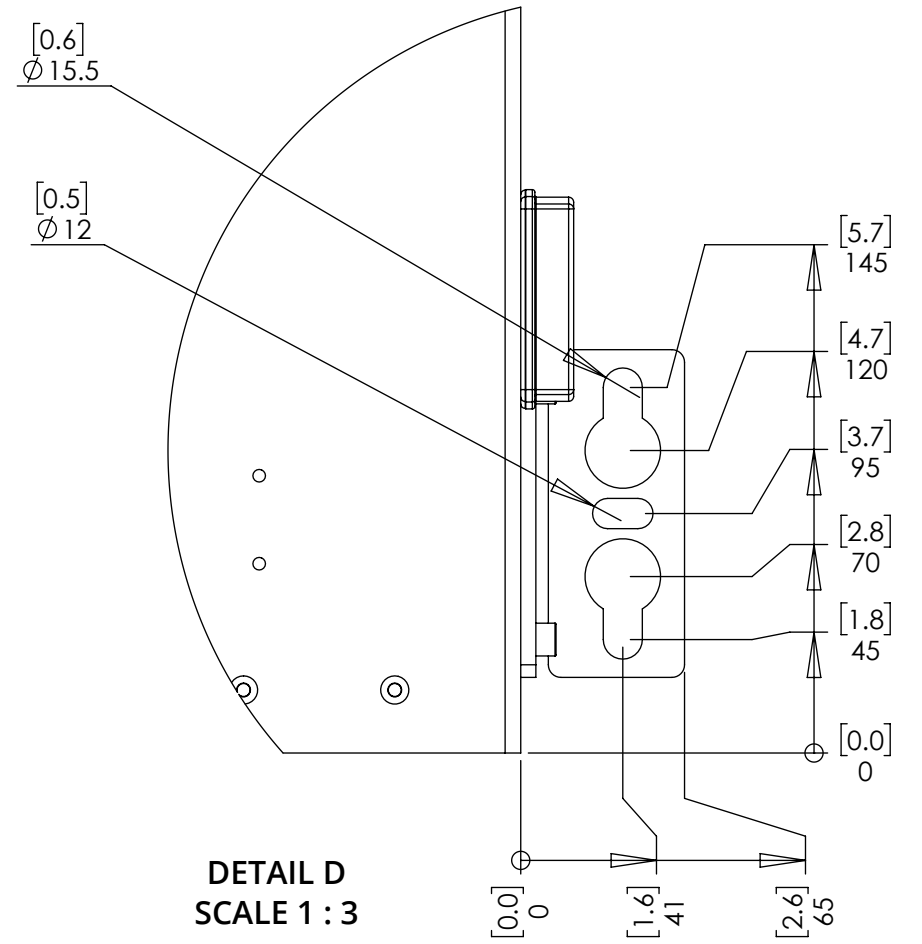

DETAIL D
SCALE 1 : 3


CHR8-MO

MARINE OUTDOOR CEILING HINGE RANGE



future automation

MECHANISM DIMENSIONS - OPEN

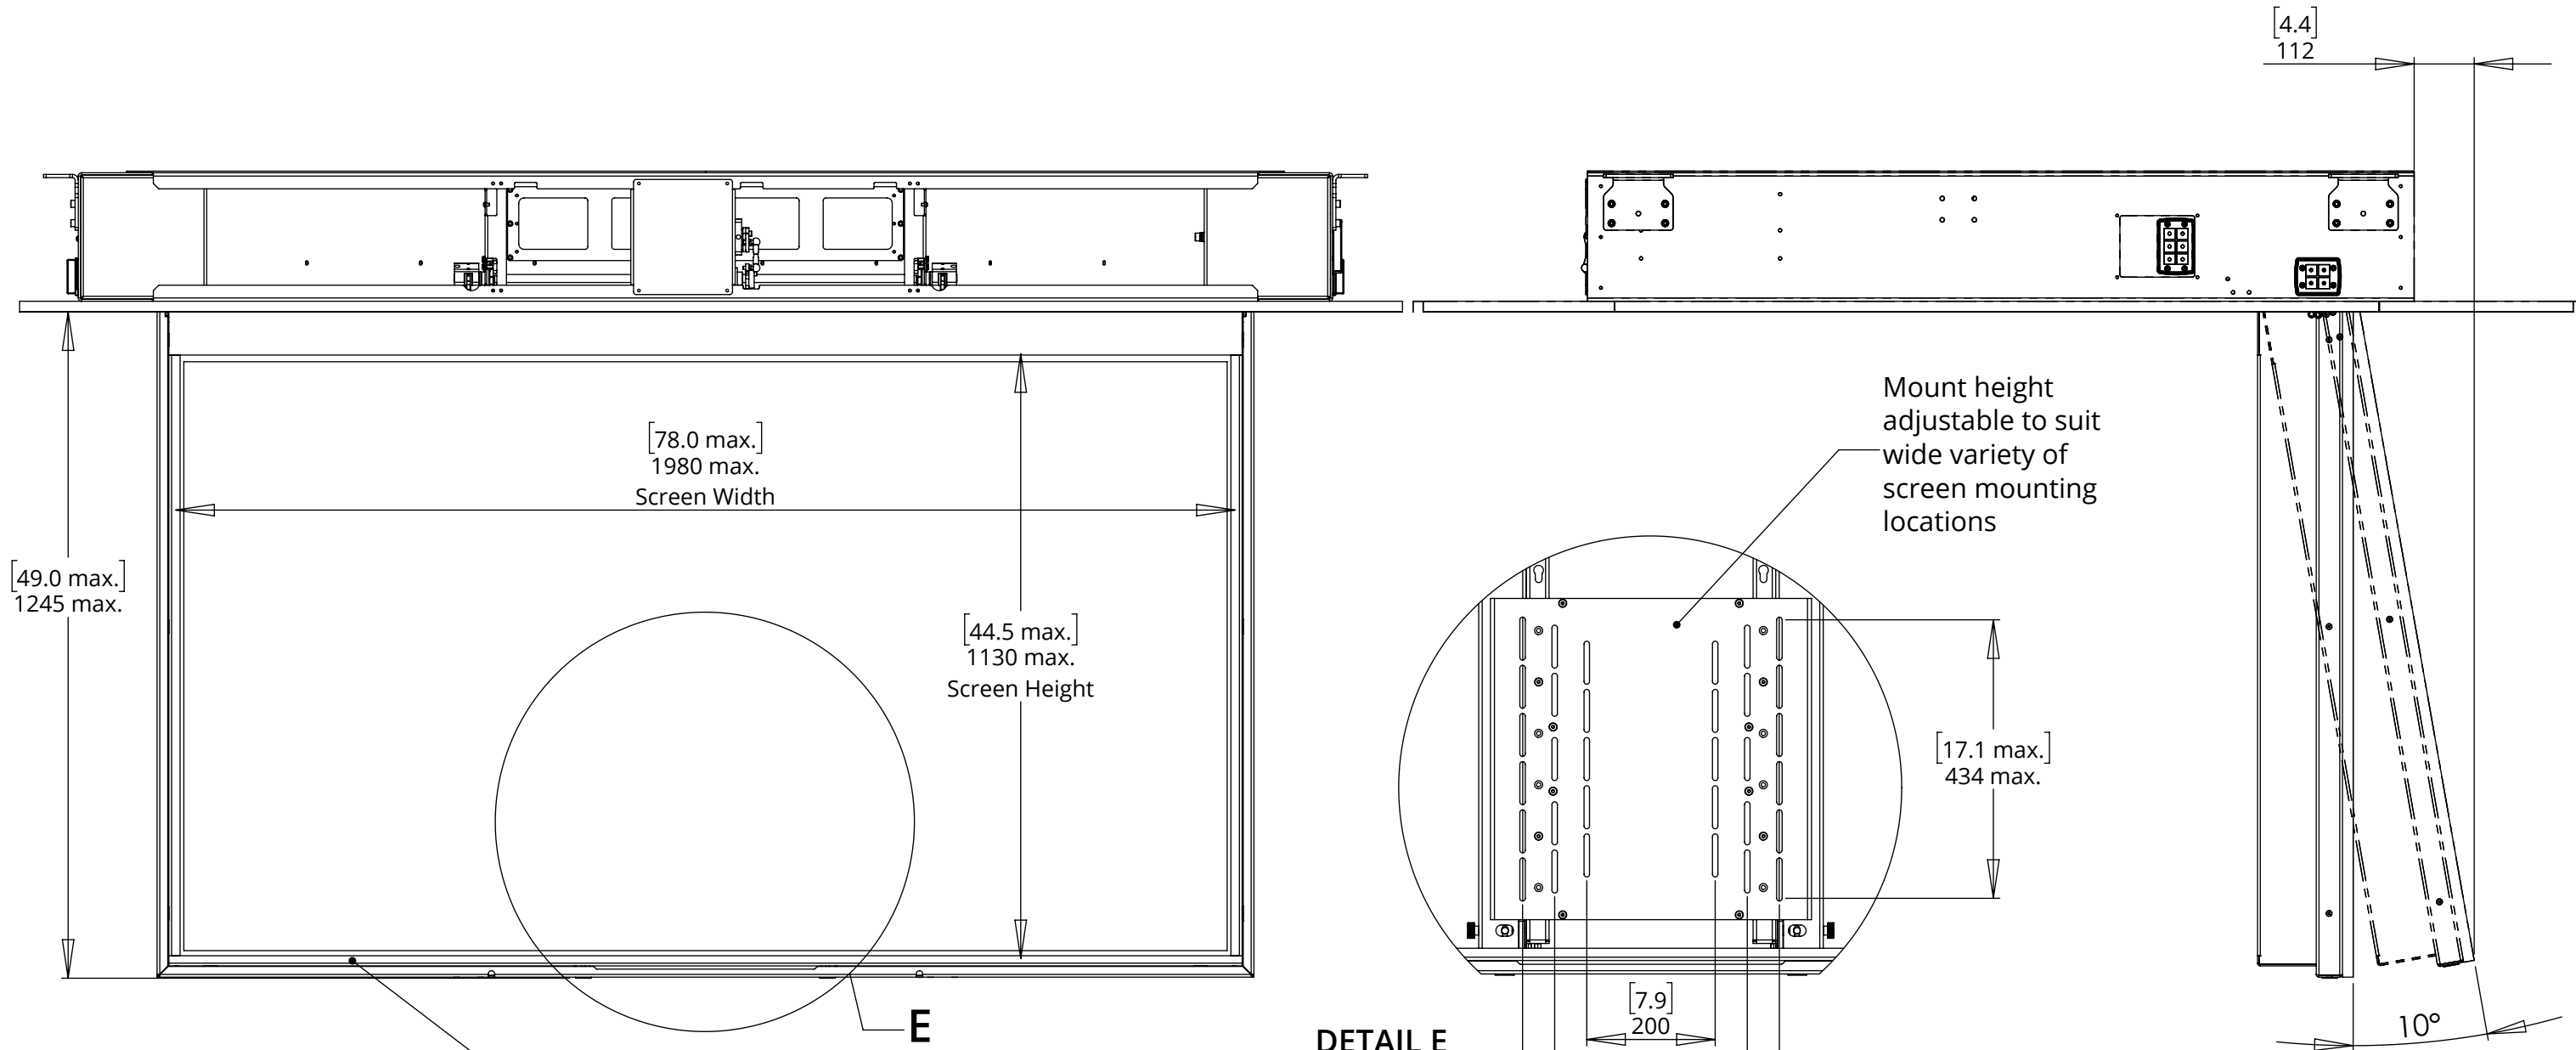

Shown with custom screen surround.

Supplied at request, screen details required at point of order.

**DETAIL E
Mount Details**

Mount height adjustable to suit wide variety of screen mounting locations

Maximum VESA 400 x 400 supplied as standard

Custom Mount Options available on request


CHR-MO CONTROL

MARINE OUTDOOR CEILING HINGE RANGE



future automation

CONTROL BOX DETAILS

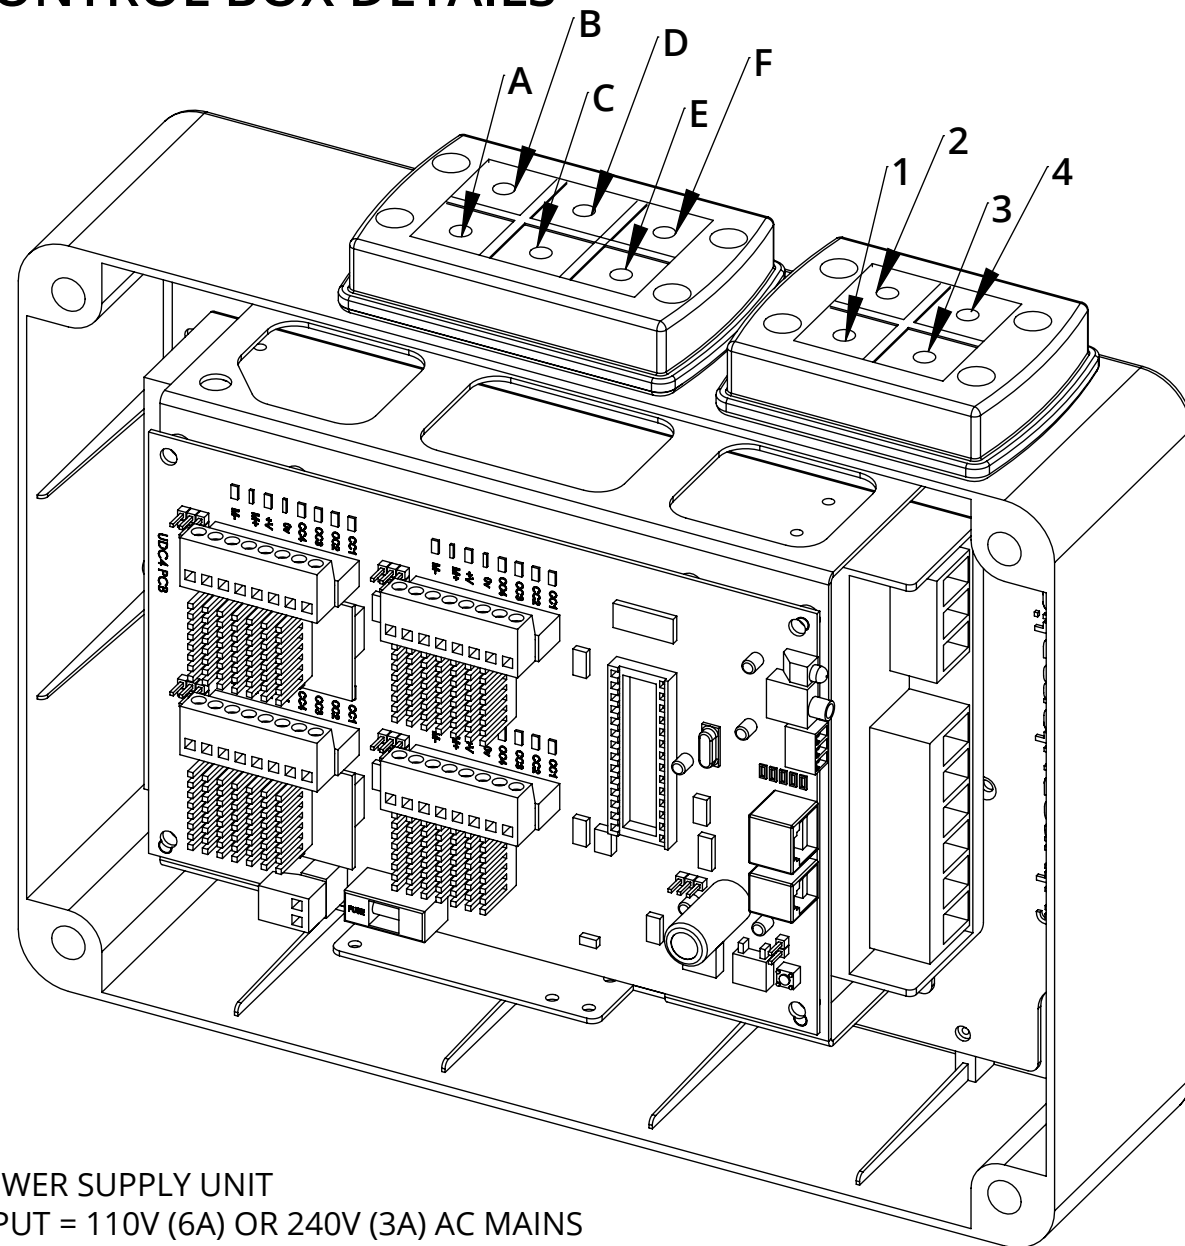

IP66 Multicable Glands.



Supplied with standard set of glands to suit mechanism control cables.

- | | | |
|----|---|--|
| A. | Hinge Motor A + B Power | - (4 x 1 core) - 3.42mm [0.13"] dia. (EU SPEC: 2.12mm ² US SPEC:14AWG) |
| B. | Hinge Motor A Signal + IN / OUT SW | - (1 x 8 core) 5.6mm [0.22"] dia. (EU SPEC: 0.22mm ² US SPEC: 24AWG) |
| C. | Hinge Motor B Signal | - (1 x 6 core) 4.6mm [0.18"] dia. (EU SPEC: 0.22mm ² US SPEC: 24AWG) |
| D. | Marine Catch Power | - (2 x 1 core) - 3.42mm [0.13"] dia. (EU SPEC: 2.12mm ² US SPEC: 14AWG) |
| E. | Marine Catch Switches | - (1 x 3 core) - 3.6mm [0.14"] dia. (EU SPEC: 0.22mm ² US SPEC: 24AWG) |
| F. | Blank | |
| 1. | Control Board Power - 3 Core Mains | 6mm [0.25"] dia. (EU SPEC: 0.75mm ² US SPEC: 18AWG) |
| 2. | Cat 5e 8 core - RS232 interface | 5mm [0.2"] dia.(EU SPEC: 0.2mm ² US SPEC: 24AWG) |
| 3. | Cat 5e 8 core - Contact Closure interface | 5mm [0.2"] dia.(EU SPEC: 0.2mm ² US SPEC: 24AWG) |
| 4. | FA IR Receiver Cable | 3mm [0.12"] dia.(EU SPEC: 0.12mm ² US SPEC: 25AWG) |


POWER SUPPLY UNIT
 INPUT = 110V (6A) OR 240V (3A) AC MAINS
 OUTPUT = 24V DC, 21A

NOTES

- ENCLOSURE IS RATED TO IP56 / GLANDS ARE RATED TO IP66
- ENCLOSURE AND LID FIXINGS ALL MADE FROM GEWISS GW PLAST 75.
- ENCLOSURE MATERIAL SUITABLE FOR TEMPERATURES +60 C TO -25 C.
- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

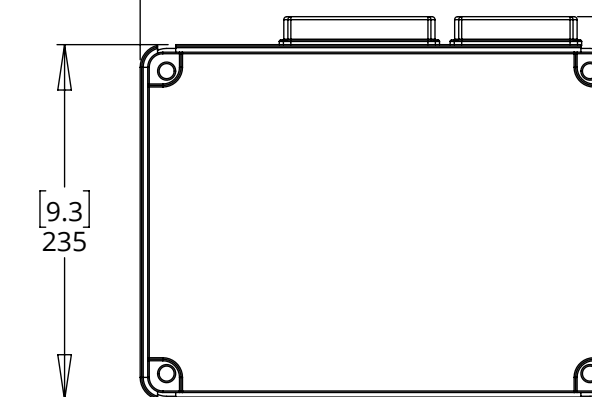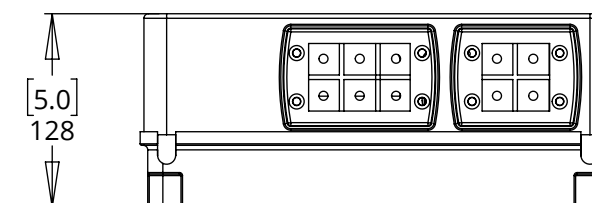

Supplied with 3M [10']
loom as standard

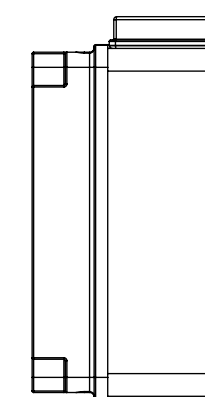

TECHNICAL SHEET

ISSUE 001
SHEET 8

UK +44 (0) 1438 833577 US +1 (603) 742 9181

www.FUTUREAUTOMATION.NET