


SA42-4 SMALL APERTURE® SERIES

3-INCH IN-CEILING OR IN-WALL APERTURE

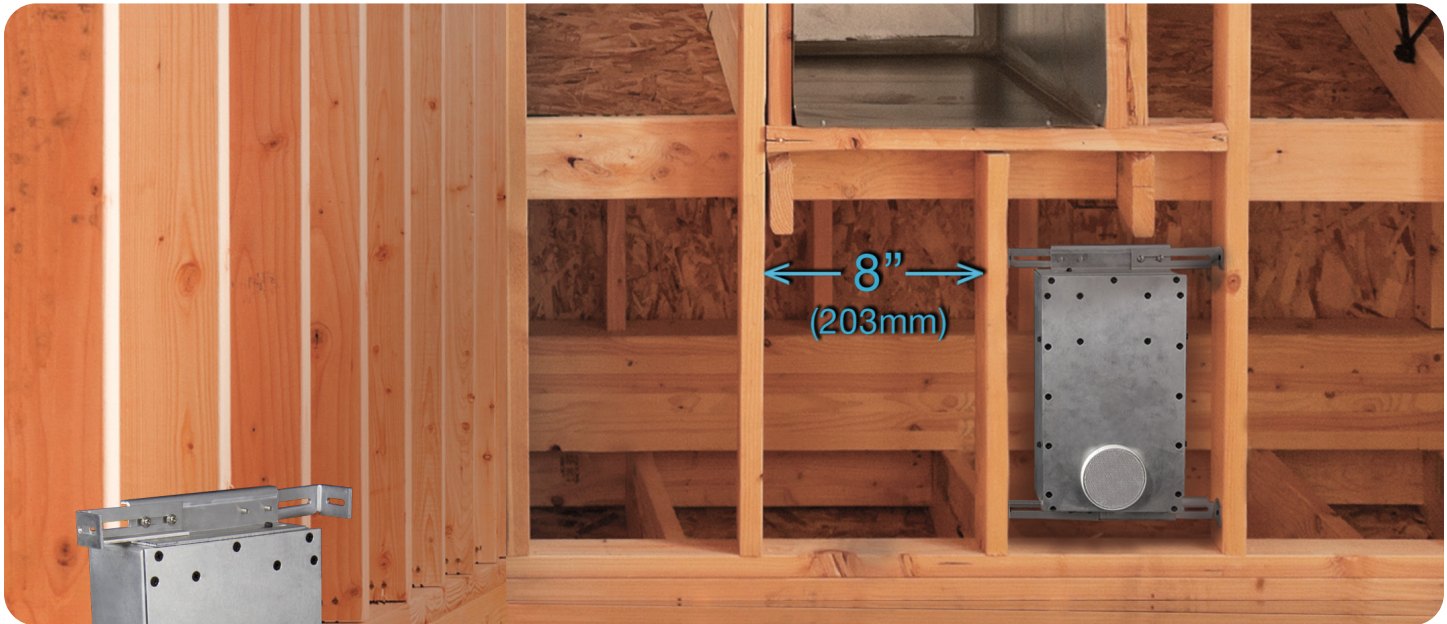

(1) 4" (102 mm) High Excursion Aluminum Woofer (1) 2" (50 mm) Aluminum Midrange / High Frequency Module


Unlike anything you have seen or heard, James Loudspeaker has raised industry standards once again. From our iconic Small Aperture® speaker series, the James team brings you the SA42-4: the most compact and affordable option in our stellar array of discrete in-ceiling or in-wall architectural loudspeakers. Like its larger cousins, the SA42-4 has been designed to deliver the full, rich, dynamic audio experience that would be expected from a much larger and more obtrusive loudspeaker system, all from the smallest of openings at just 3-inches round or square. The compact design of the SA42-4 still utilizes a full 2-way system for an astoundingly wide frequency response all the way down to 70Hz, using a high excursion 4-inch bandpass woofer, and a 2-inch mid/high frequency module. Full coverage and high SPL from such a small, seamless grille may cause your customers to look twice!

With aircraft grade aluminum construction and a modular design, the SA42-4 provides long life and easy serviceability, while a proprietary protection circuit offers the utmost in long term reliability. The SA42-4 requires a small installation footprint, fitting easily into shallow depths including a 2x4 stud bay. Can be paired with an optional Small Aperture or PowerPipe subwoofer for extended low frequencies and greater SPL.

Woofer pre-install (SA42-4-ENC), module (SA42-4-MOD), and trim kits available to order separately

SA42-4 Sub Assembly
SA42-4-MOD Midwt Module

SA63 Style	Type
SA3-GRILLE-R-SR	3" Round Sheetrock, .5" d
SA3-GRILLE-R-SS	3" Round Solid Surface, .5" d
SA3-GRILLE-R-RF	3" Round Retrofit, .5"d, .375" Bezel
SA3-GRILLE-S-SR	3" Square Sheetrock, .5" d
SA3-GRILLE-S-SS	3" Square Solid Surface, .5" d
SA3-GRILLE-S-RF	3" Square Retrofit, .5"d, .375" Bezel
SA3-SP-0.125	1/8" Spacer Ring
SA3-SP-0.375	3/8" Spacer Ring



Square Option



Round Option



Spacer Ring

- Size 12 h x 7 w x 3.4 d (in)
305 h x 178 w x 86.4 d (mm)
- Freq Response 70Hz-24kHz
- Impedance 4 ohm
- Sensitivity 85dB 2.83V /1m
- Power req. 25-100 W (Protection Limited)
- Woofer (1) 4" (102 mm) Aluminum
- Mid (1) 2" (50 mm) Aluminum
- Connector Pigtail 4 ft (121.92cm)
- Finishes See Trim Kit Options



2185 Park Place, Minden, NV 89423
Ph:+1.775.461.7500
www.jamesloudspeaker.com



Retro-fit designed with drop-ceilings in mind.



Sheetrock application with additional spacer shown.



Wood fit designed for flush mount applications.