

SONANCE


MARINER MX DATA SHEET

MX62 SST

TECHNICAL SPECIFICATIONS

| | |
|---|---|
| SKU | MX62 SST 93617 - White 93616 - Black |
| UOM | Each |
| Tweeter | 1" (25mm) cloth dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil |
| Woofers | 6.5" (165mm) textured polypropylene cone, rubber surround, dual voice coil |
| Dispersion Technology | Sinusoidal Textured Waveguide |
| Frequency Response | 55Hz-20Hz +/-3dB |
| Impedance | 8 ohms nominal; 6 ohms minimum |
| Power Handling | 5 Watts minimum; 125 Watts maximum |
| Sensitivity | 89dB SPL (2.83V/1 meter) |
| Environmental | Mill Spec 810 for humidity, salt spray, temperature, UV; IP66 waterproof rating |
| Environmental Temp | -13° to 149°F (-25°C to 65°C) |
| Grille Material | Perforated aluminum |
| Color | White (RAL 9003) or Black (RAL 7021) |
| Dimensions without Bracket (WxHxD) | 7.56" x 12.15" x 7.32" (192mm x 308.5mm x 186mm) |
| Dimensions with Bracket (WxHxD) | 7.56" x 12.95" x 7.83" (192mm x 329mm x 199mm) |
| Shipping Weight | 7lbs (3.2kg) each |

DIMENSIONAL DRAWINGS

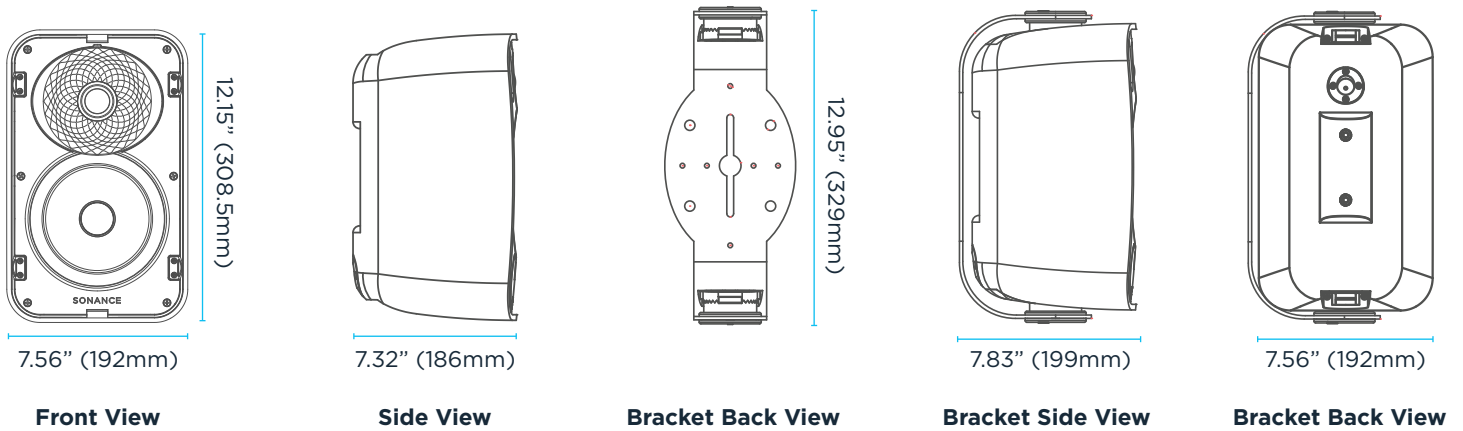

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2024 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com 07.21.2024